



POWER EQUIPMENT

GMC SYCLONE Air Compressors

SYCLONE 1610A

- 1 HP (Rated/Running)
- 1.6 Gallon Aluminum Tank
- 3.80 CFM @ 40 PSI
- 2.35 CFM @ 90 PS

SYCLONE 1675A

- 3/4 HP (Rated/Running)
- 1.6 Gallon Aluminum Tank
- 2.40 CFM @ 40 PSI
- 1.50 CFM @ 90 PS


SYCLONE 1650A

- 1/2 HP (Rated/Running)
- 1.6 Gallon Aluminum Tank
- 1.90 CFM @ 40 PSI
- 1.10 CFM @ 90 PS


ULTRA QUIET • OIL FREE • LIGHTWEIGHT

Pressure Control Meter and Universal Quick Connector
Allows you to monitor the tank pressure and remove the air hose quickly.

1.6 Gallon Aluminum Tank
Rust free and lightweight with the air capacity to do the job.

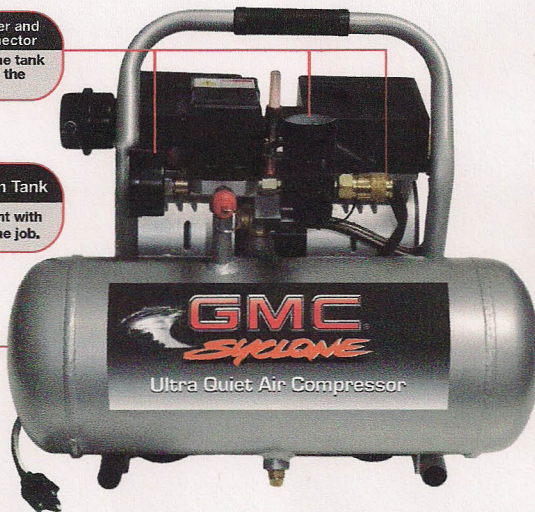

Oil-Free Pump
Cleaner air for superior tool operation and less maintenance costs.

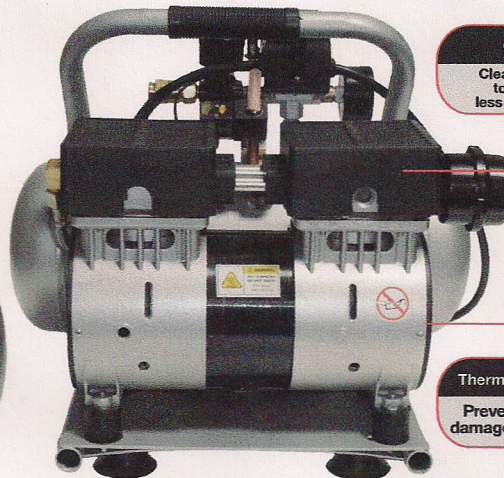

Thermal Overload Protector
Prevents air compressor damage due to over heating.

Examples of Sound Levels:

- 30 db Soft Whisper
- 56 db - GMC® SYCLONE 1650A
- 58 db - GMC® SYCLONE 1675A
- 60 db - GMC® SYCLONE 1610A
- 65 db Normal Conversation
- 80 db Cabin of a Jet Airplane
- 130 db Jet Airplane and Gunshots

The GMC® SYCLONE Air Compressor has a pump life cycle of 3000 plus hours. (1)



(1) Life Cycle is based on normal working conditions

Air Compressor / Compresor de Aire			
Model (Modelo)	SYCLONE 1610A	SYCLONE 1675A	SYCLONE 1650A
Output @ 40 PSI (Rendimiento a 40 PSI)	3.80 CFM	2.40 CFM	1.90 CFM
Output @ 90 PSI (Rendimiento a 90 PSI)	2.35 CFM	1.50 CFM	1.10 CFM
Maximum Pressure (Presión Máxima)	120 PSI	120 PSI	120 PSI
Time to Fill Tank (tiempo para llenar el tanque)	50 Seconds (50 Segundos)	70 Seconds (70 Segundos)	90 Seconds (90 Segundos)
Motor (Motór)			
Motor Type / Amps (Tipo de Motór)	Electric / 7.6 Amps	Electric / 5.5 Amps	Electric / 4.5 Amps
Horsepower (Potencia del Motór)	1.0 hp	3/4 hp	1/2 hp
Motor Speed - RPM (Velocidad)	1680 RPM	1680 RPM	1680 RPM
Voltage/Hertz (Voltaje)	110V/60HZ	110V/60HZ	110V/60HZ
Features (Características)			
Pump (Bomba)	Oil-Free (Sin Aceite)	Oil-Free (Sin Aceite)	Oil-Free (Sin Aceite)
Decibel Level (Niveles de Decibeles)	60 db	58 db	56 db
Tank Capacity (Capacidad de Tanque)	1.6 Gal / 6 L (1.6 Galones/6 Litros)	1.6 Gal / 6 L (1.6 Galones/6 Litros)	1.6 Gal / 6 L (1.6 Galones/6 Litros)
Tank Type (Tipo de Tanque)	Aluminum (Aluminio)	Aluminum (Aluminio)	Aluminum (Aluminio)
Pressure Control Meter (Medidor de Presión)	2	2	2
Universal Quick Connectors (Clavija Accesible Universal)	1	1	1
Thermal Overload Protection (Protección térmica de sobrecarga)	Yes (Si)	Yes (Si)	Yes (Si)
Dimensions (Dimensiones)			
Length (Longitud)	17.3 inches / 440 mm	17.3 inches / 440 mm	17.3 inches / 440 mm
Width (Ancho)	14.2 inches / 360 mm	14.2 inches / 360 mm	14.2 inches / 360 mm
Height (Altura)	14.6 inches / 370 mm	14.6 inches / 370 mm	14.6 inches / 370 mm
Weight (Peso)	35.0 lbs / 15.9 kg	34.0 lbs / 15.4 kg	31.0 lbs / 14.0 kg
Comes Complete with (Incluido viene)	Air Filter (Filtro de Aire)	Air Filter (Filtro de Aire)	Air Filter (Filtro de Aire)
Limited Warranty (Garantía Limitada) / UPC	1 Year (1 Año) / 7-4336974019-3	1 Year (1 Año) / 7-4336974018-6	1 Year (1 Año) / 7-4336974017-9